


HIGH TEMPERATURE OVEN




Mobile phone scan
More product information

Energy Conservation

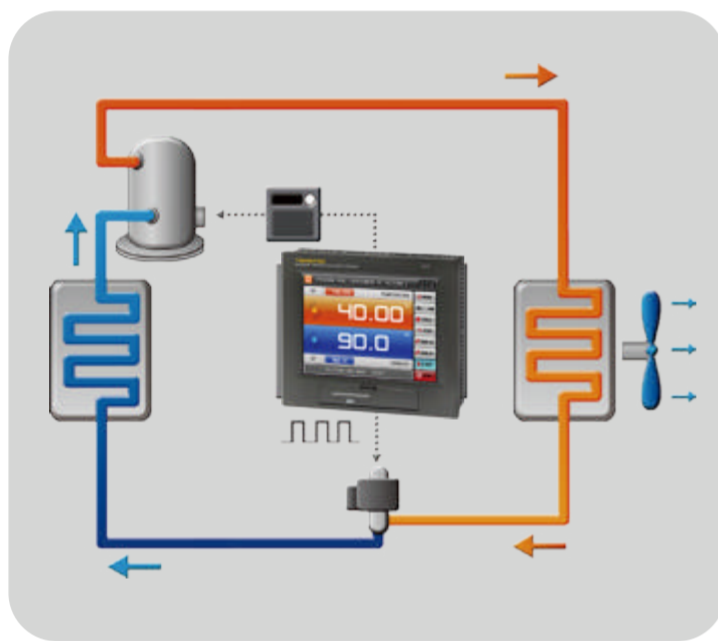

Remote network system

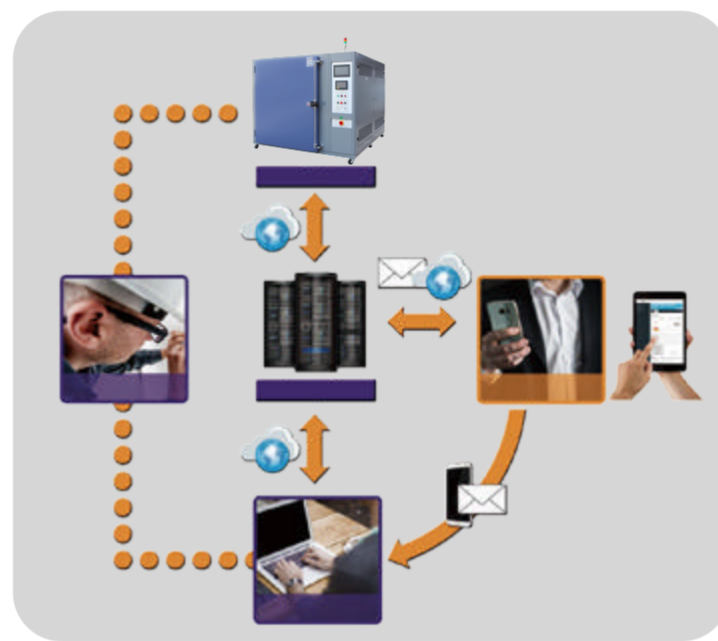

Circuit System



● Specifications

Model	SM-G-1000-DA	SM-G-1800-DA	SM-G-2520-DA	SM-G-3600-DA	SM-G-5000-DA	SM-G-8000-DA	
Temperature	Temperature range	RT℃~300℃ (A:25℃~200℃;B: 25℃~300℃;)					
	Temperature fluctuation	±0.5℃					
	Heating rate	25.0℃~100.0℃ within 8 mins 6.0~10.0℃/min					
	Temperature uniformity	±2.0℃ (25.0℃~100.0℃) ±2.5℃ (100.1℃~200.0℃)					
Material	Internal material	Adopts 1.2mm thickness stainless steel(SUS304)					
	External material	Adopts 1.2mm thickness Cold rolled steel sheet / powder spraying					
	Heat insulating material	100mm thickness mineral wool					
	Fan	SANWOOD Centrifugal blower Environmental Test Chambers					
	Heater	Nickel chromium alloy heating wire					
Size	Inner size(mm) W*H*D	1000*1000*1000	1000*1500*1200	1200*1500*1400	1200*2000*1500	1500*1800*1850	2000*2000*2000
	Outer size(mm) W*H*D	1200*1550*1450	1200*2000*1650	1400*2000*1850	1400*2350*1950	1700*2150*2300	2300*2450*2600
	Volume (L)	1000L	1800L	2520L	3600L	5000L	8000L
Power supply	380V AC 50/60Hz						
Controller	Standard: South Korea TEMI -1500 Optional: South Korea TEMI - 2500,South Korea TEMI - 2700						

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

📍 ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
☎ TEL: +86+769-81182799
📠 FAX: +86+769-82987199
✉ E-mail: info@sanwood.cc
🌐 www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website